

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

**(19) World Intellectual Property Organization
International Bureau**



(43) International Publication Date
30 June 2005 (30.06.2005)

PCT

(10) International Publication Number
WO 2005/058733 A1

(51) **International Patent Classification⁷:** B65G 17/00,
17/14, 17/26, 17/38, B66B 9/10, 11/06, 15/02, B61B
11/00, 12/10

Joseph [AU/AU]; PO Box 645, Gunnedah, New South Wales 2380 (AU).

(21) International Application Number: PCT/AU2004/001670

(74) **Agents:** SMEETON, Anthony, Richard et al.; Davies Collision Cave, Level 10, 10 Barrack Street, Sydney, New South Wales 2000 (AU).

(22) International Filing Date: 30 November 2004 (30.11.2004)

(81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(25) Filing Language: English

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE,


(71) **Applicant (for all designated States except US): MARTIN GESSNER PTY LTD [AU/AU]; PO Box 645, Gunnedah, New South Wales 2380 (AU).**

(72) Inventor; and

(75) Inventor/Applicant (for US only): MARTIN, Kevin,

[Continued on next page]

(54) Title: TRANSMISSION MECHANISMS AND COMPONENTS THEREFOR

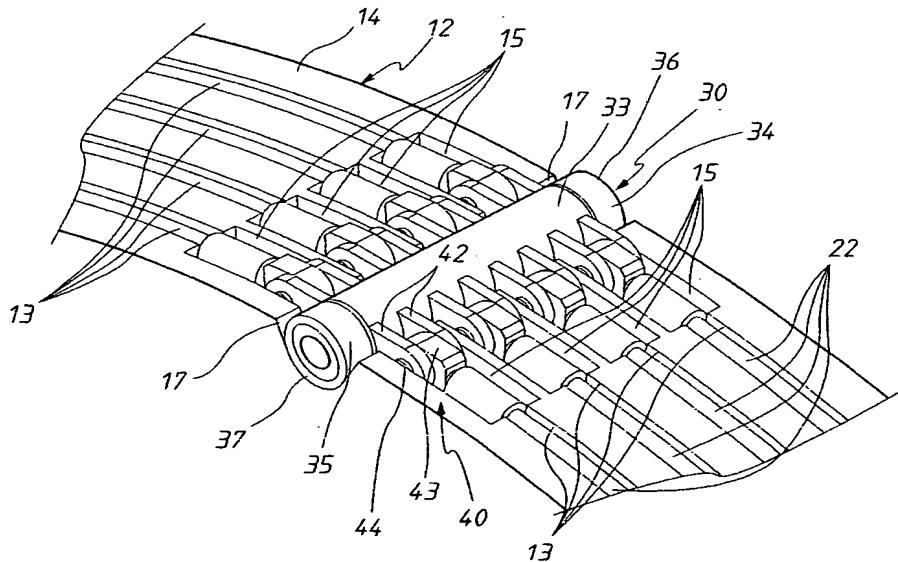

WO 2005/058733 A1

(57) Abstract: A cable assembly suitable for use in a transmission mechanism which includes at least one wheel which the cable assembly passes at least partially around when in use. The cable assembly includes at least one cable having end portions and connecting means for operatively connecting the end portions of the cable so as to form an endless track, the connecting means including a power transmission member and coupling means operatively connecting the end portions of the cable to the power transmission member, the power transmission member being receivable within recesses in the wheel as the cable assembly passes therearound.



SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*